

# 36 KEY COMMANDER KEYBOARD

Sealing IP67 frontal, PS/2 or USB compatible

This unit consists of 36 numerical, function and control keys and a compact 25mm industrial grade trackball. The condensed but well defined key layout together with the use of a separate trackball enables a fast and comfortable access of the most important machine commands and an accurate control of the screens' cursor.



KSTC36F1

dim : 182 x 135 x 25 mm

weight : 0,3 kg

## Features

- 36 short travel, tactile feel switches with 2.55 N operating force
- compact 25mm trackball with IP65 static sealing grade
- front of panel mounting by eight M3 mounting studs
- sealing into customers' panel guaranteed by added silicone sealing sponge
- directly connectable to PS/2 or USB ports via shielded cable(s) of 1.6 meter

## Applications

- navigation control
- general machine control
- public access terminal
- alarm systems consoles
- measurement equipment
- and... many others

## • CONNECTIVITY

The keyboard has 1,6 meter shielded cable(s) ended by a PS/2 or USB type A plug. Use the drivers standardly available in your operating system.

*\* Due to the increasing differences of PS/2 mouse port specifications of the various PC manufacturers, we do recommend that this unit should be tested on the final PC configuration and operating system prior to installing it in series.*


## • ORDERING INFO

<b>KSTC36F1 yyy</b>	36 key, commander keyboard
---------------------	----------------------------

yyy = protocol output :  
PS2 = PS/2 output  
USB = USB output

# 36 KEY COMMANDER KEYBOARD

## • DIMENSIONAL DRAWING

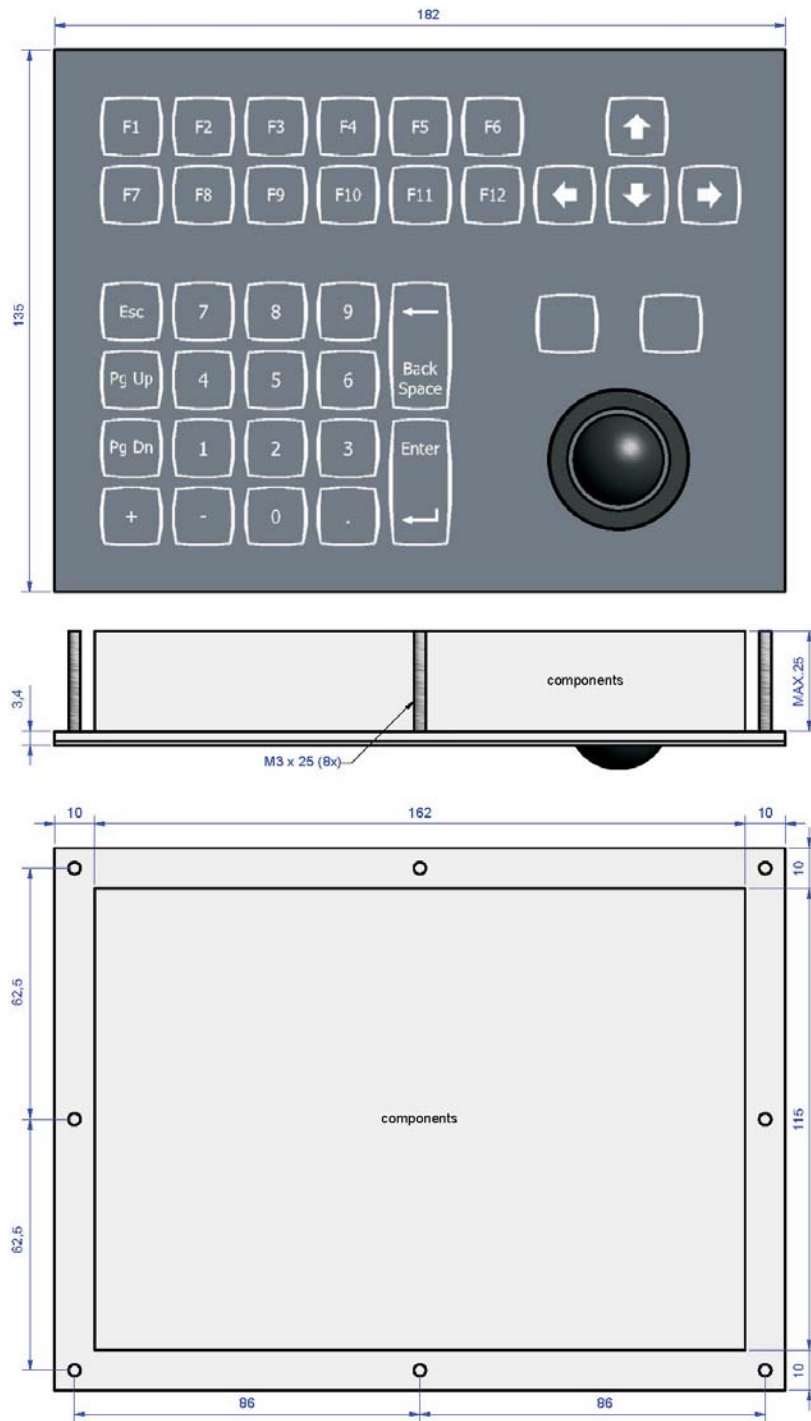

Dim in mm

### COLOURS

Keyboard Background :  
RAL7016 anthrasite grey

Key edges & key legends :  
RAL9016 Traffic white